


SIDE-BY-SIDE COMBINATION

SBSes 7165



LIEBHERR

Quality, Design and Innovation

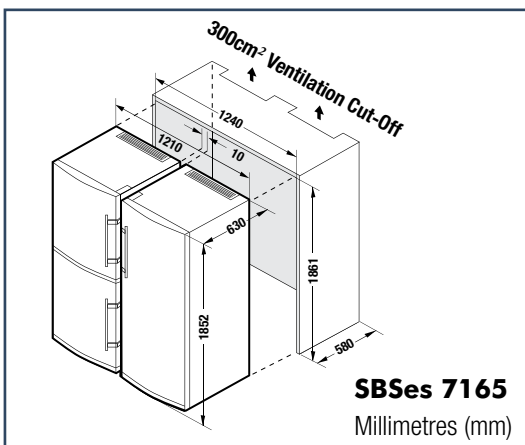

Whilst every effort is made to ensure all specifications and information in this flyer are correct at time of printing, Andi-Co Australia Pty. Ltd. reserve the right to make changes without notification. Where actual appliance measurements, specifications and ratings are crucial, we recommend that the actual appliance installation instructions that accompany each appliance be checked. Andi-Co Australia will not be liable for any loss.

Model	SBSes 7165*	
*Side-by-Sides comprised of two models	SWTNes 3010	SKBes 4213
Type I Finish	FS I SmartSteel°	FS I SmartSteel°
Energy consumption (kWh/yr) I Star rating	339kWh I 3.0	281kWh I 2.5
Compressors	1	1
Total capacity litres (L) - Gross I Net	295 I 247	393 I 355
Refrigerator gross (L) I Refrigerator net (L)	-	270 I 244
Freezer gross (L) I Freezer net (L)	150 I 119	-
BioFreshPlus gross (L) I BioFreshPlus net (L)	-	123 I 111
Wine Zone gross (L) I Wine Zone net (L)	145 I 128	-
MagicEye control system I Display	SoftTouch I LCD	SoftTouch I LCD
Child proof setting for display & temp.	•	•
LED standard lighting	-	•
SlimLine handle - integrated opening device	•	•
SoftSystem hinge - assists closure	•	•
Door open warning signal	•	•
Temperature alarm	•	•
Malfunction warning signal	•	•

Refrigerator Features

BioFreshPlus drawers on telescopic rails	N/A	1
BioFresh drawers on telescopic rails	N/A	2
SuperCool	N/A	•
GlassLine shelves	N/A	•
Elegant holding columns	N/A	•
Removable VarioBoxes	N/A	•
Bottle shelf I Egg tray	Both N/A	• I •
Automatic refrigerator defrosting	N/A	•

Freezer Features

Freezer defrosting	Frost Free	N/A
FrostSafe system with transparent drawers	•	N/A
Freezer drawers I Ice cube drawer	4 I 1	N/A
SuperFrost	•	N/A
VarioSpace	•	N/A
24hr freezing capacity (kg)	16	N/A
Cold storage accumulators	2	N/A
IceMaker	•	N/A
Ice cube capacity (kg/24h)	0.8	N/A
Ice cube stock max. (kg)	1.5	N/A
Stainless steel hose supplied (m)	1.5	N/A

Technical Information

Default hinge	Left	Right
Voltage (V) I Rated Current (A)	220-240 I 1.0	220-240 I 1.2
Made in	Germany	Germany

KEY: FS = Freestanding, N/A = Not Applicable, ° = SmartSteel is only on doors, * = Freestanding side by sides consist of two Liebherr models. These models **can** be purchased separately. Cavity clearance for freestanding units please allow min. 50 mm above the unit if there is no ventilation cut-out.