



Freezers for  
the frozen food  
and ice-cream  
industries

**LIEBHERR**

Freezers

**LIEBHERR**

# Highly efficient and economical: Liebherr freezers

Continuous operation in professional applications puts special demands on freezers for the frozen food and ice-cream industry. That is why Liebherr takes great care in the development of these appliances to meet your customer requirements with high quality and innovative ideas. High-insulating materials, in conjunction with highly efficient compressors, efficient refrigerants, and well-balanced refrigeration components as well as precision electronic

control systems, ensure outstanding refrigeration capacity – even in extreme conditions. In addition, the appliances are easy to clean and very economical in consumption. Company and product brands can be used to stimulate impulse buying. Liebherr offers a wide range of models for almost any application, always featuring premium quality and top design. You can rely on Liebherr professional appliances – 24 hours a day, 365 days a year.

## Contents

Glass lid chest freezer quality and features .....	4
Flat glass chest freezer range .....	6
Curved glass chest freezer range .....	8
Gelato chest freezer serving packs .....	10
Flip lid chest freezer quality and features.....	12
Flip lid chest freezer range.....	14
Accessories.....	16

# Increase awareness of your brand

Liebherr offers many individual and impressive branding options for freezers. You can choose between various methods and different models from the ice cream and impulse chest area. Upon request we can develop customised appliance concepts to meet your specific brand requirements.



## Customised vinyls

Depending on the quantity and motif, the desired brand is applied on a suitable vinyl sticker, usually PC film, in a screen printing or digital printing process. Vinyl stickers can be applied by Liebherr in the factory.

## Display/side wall/door colours

Customised colour design enables eye-catching presentation of your brand and extremely attractive product display. Different materials and effects can be used to individually design the side walls, the door frames, the handle, the base compartment, the display frame and the inner liner according to customer specifications.


# Quality right down to the smallest detail

Liebherr chest freezers are specially designed to meet extreme requirements and withstand high stress in professional applications. Sturdy materials, high-quality refrigeration components and quality workmanship guarantee long life. High-impact product



## Smooth-running sliding glass lid.

The curved sliding glass lids on the EFl chests are made of toughened, single-pane safety glass. The lid halves are easy to move thanks to profiled seals and the plastic frame heated by hot gas from the compressor.

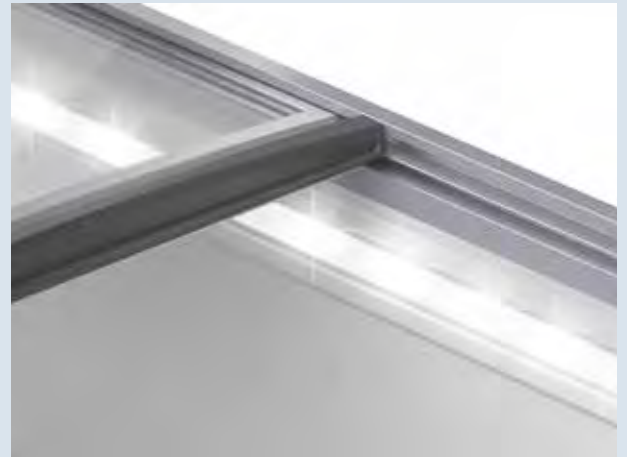

## Efficiency

Liebherr freezers operate extremely economically: highly efficient compressors, a precision electronic control system as well as highly effective insulation ensure low power consumption and low operating costs. The high quality of the virtually maintenance-free and service-friendly appliances guarantees long life and reliable operation.



## Hot-gas frame heater

The hot-gas frame heater prevents condensation on the glass lids, provides a clear view of the products inside the chest and supports optimum product presentation.



## Easy-care steel inner liner.

The steel inner liner with rounded corners is easy to clean, rust-free and scratch-resistant. Thanks to the steel material, it possesses outstanding thermal conductivity.

presentation in the chest freezers is ensured by sturdy baskets and sliding glass lids which provide a clear view. In the wide range of sales chest freezers, you will find the right appliance with suitable features for every requirement.



**Maximised total display area.**

The slim yet highly durable plastic and aluminium frame provides the greatest possible surface area for displaying merchandise. This means that customers have the best possible view of the freezer's contents and product presentation is optimised.



**Stability and design.**

Combining plastic parts at the side with connecting aluminium profiles, the cover frame of the EFl and EFE models are very attractive in appearance.



**Quieter thanks to outer skin condenser.**

Thanks to the foamed in outer skin condenser, the ice-cream chest freezers are virtually maintenance-free – and the housing is easy to clean. In addition, condensation water does not form on the outside.



**Sturdy swivel castors.**

Swivel castors make transport easier especially when the chest appliances have to be moved frequently. All EFE / EFl models are equipped with high-quality non-marking polyurethane 50-mm swivel castors.

## Sales chest freezers with LED lighting



Sales chest freezers	EFE 6052	LED	EFE 4652	LED
<b>Total gross / net capacity</b>	595 / 457 litre		444 / 339 litre	
<b>Exterior dimensions in mm (w / d / h)</b>	1885 / 680 / 825		1465 / 680 / 825	
<b>Interior dimensions in mm (w / d / h)</b>	1760 / 535 / 523		1340 / 535 / 523	
Energy consumption in 24 h	3.639 kWh		2.327 kWh	
Cooling system	static		static	
Defrost	manual		manual	
Temperature range	-10°C to -24°C		-10°C to -24°C	
Lid Type	flat sliding		flat sliding	
Lid material	laminated glass		laminated glass	
External cabinet finish	steel / white		steel / white	
Internal liner material	steel / white		steel / white	
Frame colour	grey		grey	
Type of control	analogue control		analogue control	
Temperature display	internal analogue		internal analogue	
Interior light	Full width LED strip		Full width LED strip	
Number of baskets 270/210/195 mm	1 / 7 / 0		1 / 5 / 0	
Lock	fitted		fitted	
Castors	swivel castors		swivel castors	
Insulation	60 mm		60 mm	
Water drain	yes		yes	
Climate rating	35°C / 75% Humidity		35°C / 75% Humidity	
Refrigerant	R 290		R 290	
Sound power level	52 dB(A)		52 dB(A)	
Connection rating	2.5 A / 306 W		2.5 A / 223 W	
Frequency / voltage	50 Hz / 220 – 240V~		50 Hz / 220 – 240V~	
Gross / net weight	92.1/81.9 kg		76.9/70.1 kg	
<b>Accessories</b>				
Basket 270 mm	YL7111011		YL7111011	
Basket 210 mm	YL7111041		YL7111041	
Basket 195 mm	-		-	
Partition grid 270 mm	YL7111029		YL7111029	
Partition grid 210 mm	YL7111784		YL7111784	
Partition grid 195 mm	-		-	
Rubber bumpers, grey	YL7266707		YL7266707	



<b>EFE 3852</b>		<b>LED</b>		<b>EFE 3052</b>		<b>LED</b>		<b>EFE 2252</b>		<b>LED</b>		<b>EFE 1152</b>		<b>LED</b>	
369 / 280 litre		294 / 222 litre		219 / 163 litre		104/80 litre									
1255 / 680 / 825		1045 / 680 / 825		835 / 680 / 825		625/680/825									
1130 / 535 / 523		920 / 535 / 523		710 / 535 / 523		605 / 315 / 523									
2.118 kWh		1.679 kWh		1.482 kWh		1.067 kWh									
static		static		static		static									
manual		manual		manual		manual									
-10°C to -24°C		-10°C to -24°C		-10°C to -24°C		-10°C to -24°C									
flat sliding		flat sliding		flat sliding		flat sliding									
laminated glass		laminated glass		laminated glass		laminated glass									
steel / white		steel / white		steel / white		steel / white									
steel / white		steel / white		steel / white		steel / white									
grey		grey		grey		grey									
analogue control		analogue control		analogue control		analogue control									
internal analogue		internal analogue		internal analogue		external analogue									
Full width LED strip		Full width LED strip		Full width LED strip		Full width LED strip									
1 / 4 / 0		1 / 3 / 0		1 / 2 / 0		0 / 0 / 3									
fitted		fitted		fitted		fitted									
swivel castors		swivel castors		swivel castors		swivel castors									
60 mm		60 mm		60 mm		70 mm									
yes		yes		yes		yes									
35°C / 75% Humidity		35°C / 75% Humidity		35°C / 75% Humidity		35°C / 75% Humidity									
R 290		R 290		R 600a		R 600a									
52 dB(A)		42 dB(A)		42 dB(A)		42 dB(A)									
1.5 A / 218 W		1.5 A / 192 W		1.5 A / 144 W		1.5 A / 129 W									
50 Hz / 220 – 240V~		50 Hz / 220 – 240V~		50 Hz / 220 – 240V~		50 Hz / 220 – 240V~									
69.3/61.2 kg		61.8/54.4 kg		50.5/47 kg		44/40.9 kg									
YL7111011		YL7111011		YL7111011		-									
YL7111041		YL7111041		YL7111041		-									
-		-		-		YL7112788									
YL7111029		YL7111029		YL7111029		-									
YL7111784		YL7111784		YL7111784		-									
-		-		-		YL7111712									
YL7266707		YL7266707		YL7266707		YL7266707									

## Impulse sales chest freezers



Impulse sales chest freezers	EFI 4853 <span style="float: right; font-size: 0.8em;">LED</span>	EFI 3553 <span style="float: right; font-size: 0.8em;">LED</span>
<b>Total gross / net capacity</b>	499 / 355 litre	354 / 249 litre
<b>Exterior dimensions in mm (w / d / h)</b>	1675 / 680 / 825	1255 / 680 / 825
<b>Interior dimensions in mm (w / d / h)</b>	1550 / 535 / 490	1130 / 535 / 490
Energy consumption in 24 h	3.04 kWh	2.118 kWh
Cooling system	static	static
Defrost	manual	manual
Temperature range	-10°C to -24°C	-10°C to -24°C
Lid Type	curved sliding	curved sliding
Lid material	laminated glass	laminated glass
External cabinet finish	steel / white	steel / white
Internal liner material	steel / white	steel / white
Frame colour	grey	grey
Type of control	analogue control	analogue control
Temperature display	internal analogue	internal analogue
Interior light	Full width LED strip	Full width LED strip
Number of baskets 270 / 210 / 195 mm	1 / 6 / 0	1 / 4 / 0
Lock	fitted	fitted
Castors	swivel castors	swivel castors
Insulation	60 mm	60 mm
Water drain	yes	yes
Climate rating	35°C/ 75% humidity	35°C / 75% Humidity
Refrigerant	R 290	R 290
Sound power level	52 dB(A)	52 dB(A)
Connection rating	2.5A/310 W	1.5 A / 213 W
Frequency / voltage	50 Hz / 220-240 V~	50 Hz / 220 – 240V~
Gross / net weight	89.5 / 79.9 kg	68.6 / 60.4 kg
<b>Accessories</b>		
Basket 270 mm	YL7111009	YL7111009
Basket 210 mm	YL7111766	YL7111766
Partition grid 270 mm	YL7111031	YL7111031
Partition grid 210 mm	YL7111784	YL7111784
Rubber bumpers, grey	YL7266707	YL7266707





### EFI 2853

LED

### EFI 2153

LED

282 / 196 litre  
 1045 / 680 / 825  
 920 / 535 / 490  
 1.679 kWh  
 static  
 manual  
 -10°C to -24°C  
 curved sliding  
 laminated glass  
 steel / white  
 steel / white  
 grey  
 analogue control  
 internal analogue  
 Full width LED strip  
 1 / 3 / 0  
 fitted  
 swivel castors  
 60 mm  
 yes  
 35°C / 75% Humidity  
 R 290  
 42 dB(A)  
 1.5 A / 122 W  
 50 Hz / 220 – 240V~  
 61.3 / 53.8 kg

211 / 143 litre  
 835 / 680 / 825  
 710 / 535 / 490  
 1.482 kWh  
 static  
 manual  
 -10°C to -24°C  
 curved sliding  
 laminated glass  
 steel / white  
 steel / white  
 grey  
 analogue control  
 internal analogue  
 Full width LED strip  
 1 / 2 / 0  
 fitted  
 swivel castors  
 60 mm  
 yes  
 35°C / 75% Humidity  
 R 600a  
 42 dB(A)  
 1.5 A / 98 W  
 50 Hz / 220 – 240V~  
 54.2 / 47.5 kg

YL7111009  
 YL7111766  
 YL7111031  
 YL7111784  
 YL7266707

YL7111009  
 YL7111766  
 YL7111031  
 YL7111784  
 YL7266707



**Chest Freezer, Glass Canopy & 4 Baskets**

**EFI 4853 Gelato Pack**

LED

**Freezer: Total gross / net litres**

499 / 355

**Exterior dimensions W / D / H (mm)**

1719 / 677 / 1245 Includes Canopy

**Interior dimensions W / D / H (mm)**

1550 / 535 / 656 Freezer Cavity

Total display surface area (TDA)

0.82 m<sup>2</sup>

Energy consumption in 365 days

1110 kWh

Climate rating

+10°C to +35°C

Refrigerant

R 290

Sound power level dB(A)

52

Connection rating

2.5 A

Voltage

220 - 240

Cooling system

Static

Defrosting

Manual

Temperature range

-10°C to -24°C

Lighting

Full width LED strip

Lid material

Curved sliding glass

Housing material / colour

Lid steel / white

Liner material

Steel

Type of control

Analogue controls

Temperature display

Internal analogue

Fits 5L & 7L Gelato tubs

Maximum 12

3 in 1 gelato tub basket

4

Castors

Yes

Type of castors

Swivel

Lock

Can be retrofitted

Insulation (mm)

60

Defrost water drain

Yes

Weight gross / net (kg)

130.50 / 119 (includes canopy)

**Accessories**

Grey rubber bumper

YL7266707



### Chest Freezer, Glass Canopy & 4 Baskets

### EFI 3553 Gelato Pack

LED

**Freezer: Total gross / net litres**

354 / 249

**Exterior dimensions W / D / H (mm)**

1299/677/1245 Includes Canopy

**Interior dimensions W / D / H (mm)**

1130 / 535 / 656 Freezer Cavity

Total display surface area (TDA)

0.60 m<sup>2</sup>

Energy consumption in 365 days

773 kWh

Climate rating

+10°C to +35°C

Refrigerant

R 290

Sound power level dB(A)

52

Connection rating

1.5 A

Voltage

220 - 240

Cooling system

Static

Defrosting

Manual

Temperature range

-10°C to -24°C

Lighting

Full width LED strip

Lid material

Curved sliding glass

Housing material / colour

Lid steel / white

Liner material

Steel

Type of control

Analogue controls

Temperature display

Internal analogue

Fits 5L & 7L Gelato tubs

Maximum 9

3 in 1 gelato tub basket

3

Castors

Yes

Type of castors

Swivel

Lock

Can be retrofitted

Insulation (mm)

60

Defrost water drain

Yes

Weight gross / net (kg)

102.60 / 92.40 (includes canopy)

#### Accessories

Grey rubber bumper

YL7266707

# How you benefit, at a glance.

The easily **replaceable seal** in the chest lid ensures optimal hygiene, airtight closing and extends the service life of the chest.

**Foamed-in skin-condenser in the outer surface** for quiet and low-vibration operation.



The **sturdy chest lid** (stainless steel or white) can also be used as an additional work surface.



Full-length **ergonomic recessed grip** for convenient opening and closing.

No energy loss and optimum energy efficiency due to **highly effective insulation**.

**No condensation on the housing** and easy-to-clean outer surface for perfect hygiene.




**Inner liner made of robust, coated sheet steel** for increased durability and easy cleaning.



Optimum clarity thanks to **LED lighting** in the interior.

**Sturdy castors** make transport easier and allow you to clean the floor under the chest.

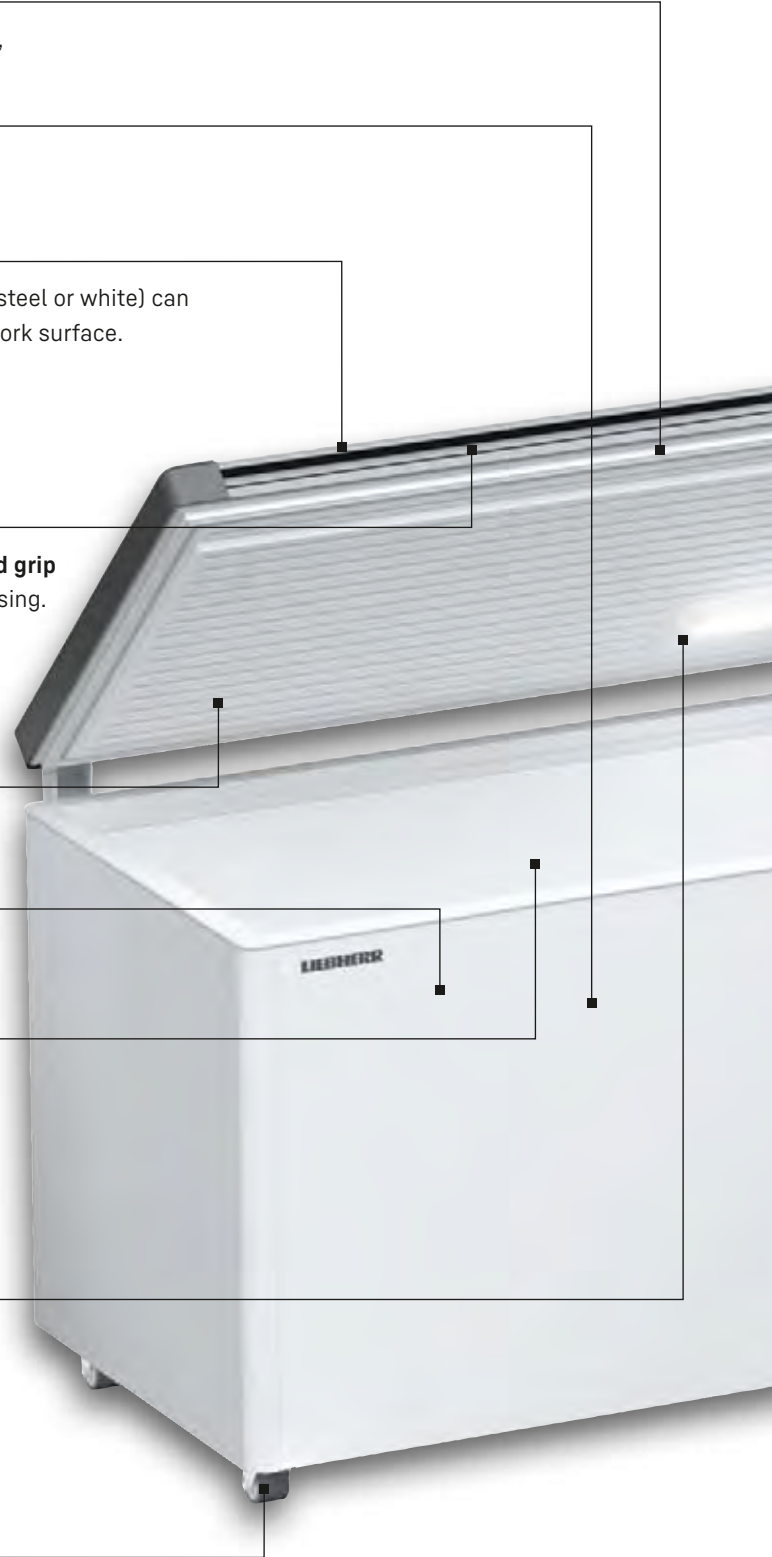

Secured against unauthorised access **by a robust lock.**



More orderly storage and flexibility in the distribution of the goods due to **sturdy mesh baskets.**



More energy efficiency and sustainability thanks to **natural and HFC-free refrigerant R 600a** in combination with powerful compressors.

**Extremely robust, stable and torsion-free chest body**, suitable even for very intensive loads.

**Stop Frost**

The ice-free interior means less frequent defrosting thanks to the **StopFrost system** and the door can be effortlessly opened and closed repeatedly due to the prevention of negative pressure.

**Frost Protect**

Maximum flexibility in the choice of installation location due to **an extended ambient temperature range** from **-15 °C to 43 °C.**

EFL 6056

More storage safety due to the **analogue temperature display** with interior temperature indicator, accurate to the degree. Operating temperature adjustable from **-14 °C to -24 °C.**



## Flip Lid Chest Freezers



Chest freezers	EFL 6056	EFL 4656
<b>Total gross / net capacity</b>	542 / 520	404 / 387
<b>Exterior dimensions W / D / H (mm)</b>	1885 / 720 / 825	1465 / 720 / 825
<b>Interior dimensions W / D / H (mm)</b>	1760 / 535 / 610	1340 / 535 / 610
Energy consumption in 365 days (kWh)	467	442
Energy consumption in 24 hours (kWh)	1.279	1.211
Climate rating	7 (+10°C to +35°C / 75% Humidity)	7 (+10°C to +35°C / 75% Humidity)
Refrigerant	R 600a	R 600a
Sound power level dB(A)	33	33
Connection rating	1.5 A	1.5 A
Frequency / voltage	220 - 240 V~	220 - 240 V~
Cooling system	Static	Static
Defrosting method	Manual	Manual
Temperature range	-10°C to -24°C	-10°C to -24°C
Lid Type	Flip Lid	Flip Lid
Lid Material	Stainless Steel	Stainless Steel
External cabinet finish	Steel / White	Steel / White
Internal liner material	Steel / White	Steel / White
Frame colour	White	White
Type of control	Analogue	Analogue
Temperature display	External	External
Interior light	LED under lid	LED under lid
Number of baskets 270 / 210 (mm)	1 / 7	1 / 5
Basket material	Same as EFE	Same as EFE
Handle	Recessed grip	Recessed grip
Lock	Fitted	Fitted
Castors	Swivel	Swivel
Insulation (mm)	60	60
Water drain	Yes	Yes
Weight gross / net (kg)	99 / 89	90 / 81
<b>Accessories</b>		
Grey rubber bumper	YL7266707	YL7266707
Basket Divider 210	YL7111784	YL7111784
Basket Divider 270	YL7111029	YL7111029
Basket 210 mm	YL7111047	YL7111047
Basket 270 mm	YL7111045	YL7111045



**EFL 3056**

266 / 254  
 1045 / 720 / 825  
 920 / 535 / 610  
 340  
 0.932  
 7 (+10°C to +35°C / 75% Humidity)  
 R 600a  
 33  
 1.5 A  
 220 - 240 V~  
 Static  
 Manual  
 -10°C to -24°C  
 Flip Lid  
 Stainless Steel  
 Steel / White  
 Steel / White  
 White  
 Analogue  
 External  
 LED under lid  
 1 / 3  
 Same as EFE  
 Recessed grip  
 Fitted  
 Swivel  
 60  
 Yes  
 75 / 62

YL7266707  
 YL7111784  
 YL7111029  
 YL7111047  
 YL7111045

## Accessories

### Section: Chest freezers

#### Baskets

Products can be presented in a clearly sorted arrangement with the suspended baskets. Suitable for all EFI, EFE and EFL models.

Basket 210mm - EFE	YL7111041
Basket 210mm - EFI	YL7111766
Basket 210mm - EFL	YL7111047
Basket 270mm - EFE	YL7111011
Basket 270mm - EFI	YL7111009
Basket 270mm - EFL	YL7111045
Basket 195mm - EFE 1152	YL7112788



#### Partition grid

The partition grids for baskets support optimum product presentation and allow flexible organisation of the interior. Suitable for all EFI and EFE models.

Basket Divider 195mm - EFE1152	YL7111712
Basket Divider 210mm - EFE, EFI, EFL	YL7111784
Basket Divider 270mm - EFE, EFL	YL7111029
Basket Divider 270mm - EFI	YL7111031




#### Rubber bumpers

Rubber bumpers can be fixed to provide better ventilation when freezers are placed next to each other and to avoid damages during moving. Suitable for all EFI, EFE and EFL models.

Rubber bumper grey - EFE, EFI, EFL	YL7266707
------------------------------------	-----------



  
**Andi-Co Australia**

#### Head Office

1 Stamford Road, Oakleigh Victoria 3166  
E-mail: [sales@andico.com.au](mailto:sales@andico.com.au) | Tel: 1800 685 899

**[home.liebherr.com.au](http://home.liebherr.com.au)**